



# Waterproof Rigid Core Flooring Eloquence Plank



2655 Dawin Road N., Jacksonville, FL 32207

P:888.336.3015 F:904.281.7706

[www.forestaccents.com](http://www.forestaccents.com)





## Eloquence Plank

Eloquence is our Waterproof Rigid Core Flooring series offered in 5 beautiful colors at a high-value price point. The 7" wide plank format, embossed surface and 1.5mm attached acoustical padding provide great balance between aesthetics and performance.




Glacier Oak

FOR ELOQ GLACIER  
23.90 SF / CTN  
5.5mm x 7" x 48"



Stone Oak

FOR ELOQ STONE  
23.90 SF / CTN  
5.5mm x 7" x 48"

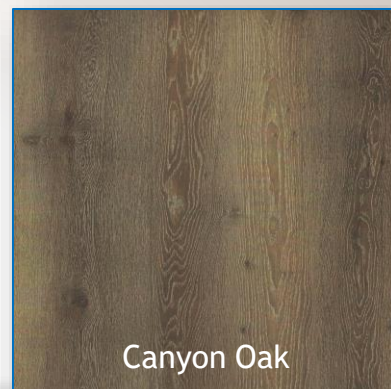


Canyon Oak

FOR ELOQ CANYON  
23.90 SF / CTN  
5.5mm x 7" x 48"




Sand Oak

FOR ELOQ SAND  
23.90 SF / CTN  
5.5mm x 7" x 48"

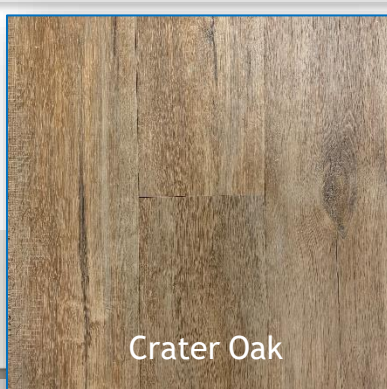

Crater Oak

FOR ELOQ CRATER  
23.90 SF / CTN  
5.5mm x 7" x 48"

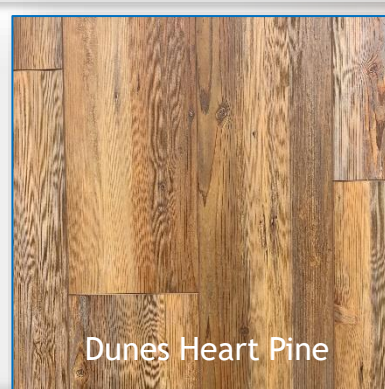

Dunes Heart Pine

FOR ELOQ DUNES  
23.90 SF / CTN  
5.5mm x 7" x 48"



100%  
WATERPROOF



**Appearance :** European Oak Visuals  
Lightly embossed surface to replicate real wood

**Finish :** 12 mil wear layer in a low gloss finish

**Edges :** 4-sided Micro Bevel

**Construction :** High density rigid composite core  
4.0mm rigid core + 1.5mm Acoustical Pad  
STC = 63, IIC=65

**Package :** 23.90 LBS/CTN, 55 CTNS/PALLET

**Warranty :** Lifetime Residential, 5 Year Light Commercial Limited Warranty

**Installation :** Glueless Locking System Floating  
Can be installed On, Above, Below grade

**Moldings :** 94.00" Stair Nose, T-mold, End-cap, Reducer

# Waterproof Rigid Core Flooring Eloquence Plank

## PRODUCT SPECIFICATION & PARTS LIST



LUD:08.05.2021

<b>Board Dimension</b>	5.5mm x 7" x 48" Thickness 4.0mm rigid core + 1.5mm Acoustical Pad (STC = 63, IIC = 65)
<b>Appearance</b>	European Oak Visuals, Lightly embossed surface to replicate real wood.
<b>Construction</b>	High density rigid composite core.
<b>Finish</b>	12 mil wear layer in a low gloss finish.
<b>Use</b>	Residential and light commercial.
<b>Installation</b>	Glueless Locking System. Can be installed on, above and below grade. Refer to the Forest Accents Installation Guide for detailed installation instructions.
<b>Package</b>	23.90 SF/CTN
<b>Quantity / Pallet</b>	55 Cartons / Pallet, 1,314.50 Sq.ft. / Pallet.
<b>Weight</b>	41.00 Lbs / Carton.
<b>Warranty</b>	Lifetime Limited Residential & 5 Year Limited Light Commercial Warranty. See Forest Accents Vinyl floor Installation Guide for detailed installation instructions and Warranty.
<b>Maintenance</b>	See Forest Accents Vinyl floor Maintenance Guide for specific details.

Color	Product Code	Decor	Wear Layer	Attached Pad	Size
Canyon Oak	FOR ELOQ CANYON	European Oak	12 mil	1.5mm Pad	5.5mm x 7" x 48"
Glacier Oak	FOR ELOQ GLACIER	European Oak	12 mil	1.5mm Pad	5.5mm x 7" x 48"
Sand Oak	FOR ELOQ SAND	European Oak	12 mil	1.5mm Pad	5.5mm x 7" x 48"
Stone Oak	FOR ELOQ STONE	European Oak	12 mil	1.5mm Pad	5.5mm x 7" x 48"
Crater Oak	FOR ELOQ CRATER	European Oak	12 mil	1.5mm Pad	5.5mm x 7" x 48"
Dunes Heart Pine	FOR ELOQ DUNES	Heart Pine	12 mil	1.5mm Pad	5.5mm x 7" x 48"

### About Photo

Product photos and website images are to offer an impression and examples of the appearance of the floor. The color, grain and character variations shown may vary from actual flooring due to the limitations in the reproduction of photography or the monitor resolutions.

2655 Dawin Road N., Jacksonville, FL 32207

P:888.336.3015 F:904.281.7706

www.forestaccents.com

